




Escalators and Moving Walks

KLEEMANN Escalators and Moving Walks

- Their functional design, in combination with the multiple choices of dimensions and equipment, offer an exceptional attractive image that fits absolutely with the ambience
- Absolute implementation at airports, undergrounds, malls, hotels, offices, etc
- Cover any safety requirements, having a high performance
- Long duration and operation life
- Noiseless operation and transport quality
- CE marking and complete certification according to EN 115 standard
- Easy installation and maintenance
- Technical support and guarantee by KLEEMANN

Ask for your free copy of KLEEMANN Escalator Design Tool

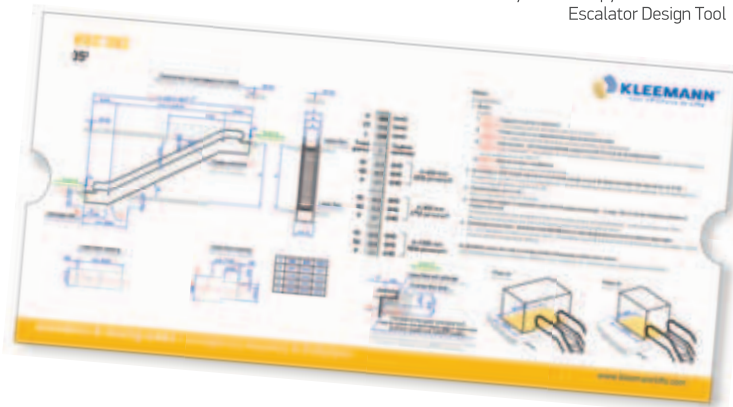

Escalators Technical Specifications

Type	KEC COMMERCIAL	KEH HEAVY DUTY
Working hours per day	16 - 20 hours	20 - 24 hours
Capacity *	Up to 7300 passengers / hour	
Inclination	30° / 35°	
Pallet width [mm]	600 / 800 / 1000	
Balustrade design	Vertical safety glass (10 mm safety tempered glass). Height 1000 mm	Vertical safety glass (10 mm safety tempered glass) Inclined satine 2mm. Height 1000 mm
Operating Speed [m/sec]	0.5	0.5 - 0.65
Vertical rise [m]	2 - 7.5	2 - 35
Motor type	One speed or VVVF	
Installation	Indoor, Semi-outdoor **, Outdoor	

Moving Walks Technical Specifications

Type	KTC COMMERCIAL	KTH HEAVY DUTY	KTW HEAVY DUTY
Working hours per day	16 - 20 hours	20 - 24 hours	
Capacity *	Up to 6000 passengers / hour		Up to 8400 passengers / hour
Inclination	10° / 11° / 12°		0° / 6°
Pallet width [mm]	800 / 1000		1000 / 1200 / 1400
Balustrade design	Vertical safety glass (10 mm safety tempered glass) Inclined satine 2mm. Height 1000 mm		
Operating Speed [m/sec]	0.5		
Vertical rise [m]	2 - 8		0 - 8
Max Installation Length [m]	—		120
Motor type	One speed or VVVF		
Installation	Indoor, Semi-outdoor **, Outdoor		

* Theoretical value based on calculations

** Direct contact with rain or snow is not allowed for this installation